



Jumper wires panel



PRACTICAL APPLICATIONS INCLUDE:

- A simple introduction to circuit protection.
- Simple switching on and dubbing of phases and neutrals.
- Two-way switch fitting.
- Fitting a light with a timer.
- Fitting a light with a dusk-to-dawn switch
- Fitting a light with a remote control switch.
- Circuits controlled by the timer switch (clock).
- Creating a sockets circuit.
- Supplying power to a radiator with a built-in thermostat.
- Controlling a roller-blind

FEATURES OF THE BASE

- Base on large wheels
- easy to move.
- Dim. L x W x H: 1500 x 690 x 1980mm
- Melamine surface: 1200 x 1700mm

- Panel supplied with a full wiring diagram and all of the detailed instructions for each component.
- The items on the panel may be different from one series to another depending on manufacturer alterations.

Standard home components are interconnected on this panel using safety terminals. All of the double insulation components are fitted with safety terminals.

ref. BASIFIL-1

COMPONENTS LOCATED ON THE PANEL

- 1 single-phase 30mA residual current circuit breaker (1)
- 2 10A circuit breakers (1)
- 1 16A circuit breaker (1)
- 1 dusk-to-dawn switch with cell (1)
- 1 timer (1)
- 1 remote control switch (1)
- 1 clock (1)
- 2 40W light bulkhead luminaires
- 2 simple lighting circuit breakers
- 2 two-way switches
- 2 simple push-buttons
- 2 16A 2P+E sockets
- 1 roller-blind control
- 2 connection terminal blocks
- 1 heating indicator light
- 1 500W convector
- 1 roller-blind

Other components: upon request


(1) items in a transparent case.
High-visibility components.



System console

Fully-wired horizontal console, ready to be connected to the mains three-phase, designed to supply a maximum total power of 4kW with:

- emergency stop + On/Off button with lamp, plus memory function.
- 1 30mA residual current circuit breaker
- 1 three-phase industrial socket +N+E with its circuit breaker.
- 1 single-phase industrial socket + E with its circuit breaker.
- 1 key-operated switch + 1 double push-button which prevents the use of industrial sockets
- 4 2P+E+circuit breaker protection sockets
- 1 single-colour remote signal tower, total length: 800mm
- single colour: brown (beige front panel)

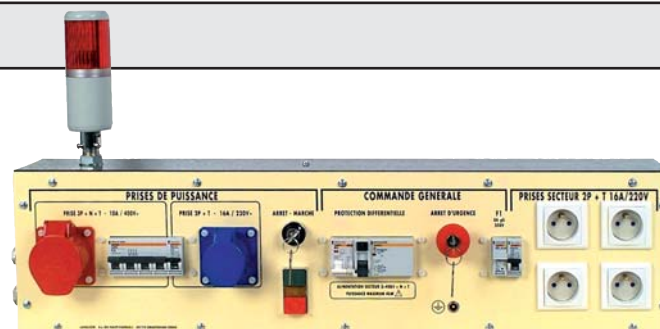

ref. PUP695